


0711 Series



► Specification	► Inlet
Power Rating	10A 250V AC Europe 15A 250V AC North America
Electric Strength	AC 2,000V for 1 Minute
Contact Resistance	30MΩ Max.
Insulation Resistance	100MΩ Min. at 500V DC
Operating Temperature	+90°C
Materials	Thermoplastic UL Flammability 94V-0 & Copper Alloy
Mounting	P : Snap-In
Terminal	N : Solder Tab (4.0 x 0.8) Q : Solder Tab (4.8 x 0.8)

Unit : mm

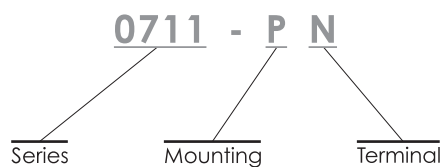