


0721 / 0724 Series

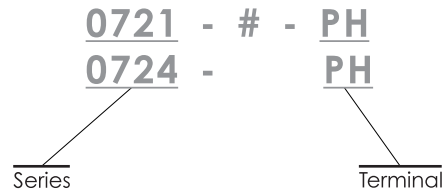

※ Wire type Optional

Specification	C8 Inlet	C6 Inlet
Power Rating	2.5A 250V AC Europe & UL & CSA 7A 125V AC UL	2.5A 250V AC Europe & UL & CSA 7A 125V AC UL
Electric Strength	AC 2,000V for 1 Minute	AC 2,000V for 1 Minute
Contact Resistance	30MΩ Max.	30MΩ Max.
Insulation Resistance	100MΩ Min. at 500V DC	100MΩ Min. at 500V DC
Operating Temperature	+105°C	+105°C
Materials	Thermoplastic UL Flammability 94V-0 & Copper Alloy	Thermoplastic UL Flammability 94V-0 & Copper Alloy
Terminal	PH : Clamps	PH : Clamps

Unit : mm

